



NUTECHOVERSEAS

Trusted Manufacturer for Critical Onshore & Offshore Projects

BRANCH FITTINGS DATA SHEET





Office 24, 25 C. Sonarika, Chanda Wadi, Appt,
Nandibhai Desai Rd, Charni Road East,
Cawasji Patel Tank, Gurgaon, Mumbai,
Maharashtra 400004

sales@nutechoverseas.com

¹ Weldolet[®], Thredolet[®], Buckolet[®], Elbolet[®], Sweepolet[®], Brazolet[®], Nipolet[®], Insert Weldolet[®],
Coupolet[™], and Flexolet[™] are trademarks registered for the exclusive use of NUTECH OVERSEAS
Corporation.



When to use Weldolets [®]	4, 5
Quality Control	6
How to Order and Specify Branch Connections.....	7
Weldolet [®]	8-14
Standard.....	8, 9
Extra Strong	10, 11
Schedule 160/XX Strong.....	12, 13
Heavy Wall.....	14
Thredolet [®] and Sockolet [®]	15, 16
Flexolet [™] SA/A105 & SA/A350 LF2 CL1	
Butt-Welding, Threaded, Socket Welding	17-19
Flexolet [™] Stainless and Alloy	20-22
Flexolet [™] S5s/10s & CL 300 Light Weight.....	23
Latrolet [®] and Elbolet [®]	24, 25
Sweepolet [®]	26, 27
Insert Weldolet [®]	28
Nipolet [®]	29
Brazolet [®]	30
Coupolet [™]	31
Engineering Specifications.....	32-40
Conventional Olet [®] Run Size Combination Charts	38
Flexolet [™] Run Size Combination Charts.....	39-40

The NUTECH OVERSEAS Std. Wt. Weldolet[®], CL3000 Sockolet[®], CL3000 Thredolet[®] (1/8" through 6" outlet size) and Coupolet[™] bear the UL symbol indicating Underwriters Laboratories listing of these fittings for use in sprinkler systems and other fire protection water supply systems.



In 1943 when NUTECH OVERSEAS pioneered the "Shape of Reinforcement" for branch connections, who would have thought it would fast become a recognized industry standard. Today, NUTECH OVERSEAS Branch Connections offer complete run pipe reinforcement while avoiding cracks, fillet welds, and sharp re-entrant corner reinforcement tapering at the sides, thus preventing abrupt changes in thickness where the fitting joins the header pipe.

NUTECH OVERSEAS

CONNECTIONS - YOUR BEST CHOICE

All NUTECH OVERSEAS are inspected before leaving the factory, undergoing three separate quality control systems: one for material control, one for manufacturing and one for design control. Branch Connection forgings also undergo frequent checks against mill documents during the manufacturing process to assure the highest compliance with ASME and ASTM specifications. Plus, comprehensive record keeping of every fitting from initial forging bar through forging, heat treatment, machining, storage and shipment means every fitting is traceable to the exact material and process used in its manufacture.

NUTECH OVERSEAS Branch Connections have been designed to substantially reduce warehouse inventory. Choose from our WELDOLET® line of funneled inlet fittings or FLEXOLET™ straight thru bore fittings. Both increase stocking flexibility and savings while meeting the 100% reinforcement requirement of applicable piping codes i.e. ASME B31.1, B31.3, B31.4 and B31.8. They also meet the 2001 edition of MSS-SP-97 Standard- "Integrally Reinforced Forged Branch Outlet Fittings."

WELDOLET® is NUTECH OVERSEAS' s original conventional line of fittings that give a smooth flow transition from the header pipe into the branch. It is used worldwide in refineries, chemical plants and gas pipelines. FLEXOLET™ reduces the number of fitting sizes per outlet required, made possible by the revisions to the MSS specification. This means less warehouse bin locations, fewer individual inventory items, and less time needed for filling orders.



• **The Best Value -
Price, Quality, Service
All The Time.**




2



3



WHEN, WHERE & WHY TO USE WELDOLET® WELDING FITTINGS



WELDING TEE

MAINTAIN QUALITY – REDUCE COSTS

Use the Weldolet fitting for branch connections instead of


- Welding Tees
- Reinforced Branches
- Unreinforced Branches

because of the reasons outlined below:


1

Wherever welding fittings are required use the Weldolet in lieu of welding tees.


- a. Weldolet fittings cost 50% to 90% less than welding tees.
- b. The Weldolet fabricates 50% to 90% less than welding tees.
- c. The Weldolet allows more flexible fabrication. (Run your pipe - then weld on fittings.)
- d. The Weldolet maintains full pipe strength in accordance with ASME B16.9 and other ASME Codes for Pressure Piping.
- e. The Weldolet provides full fluid flow.

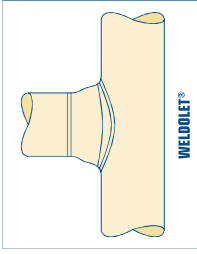


WELDOLET®

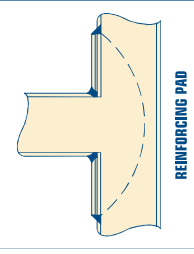

REINFORCING PAD

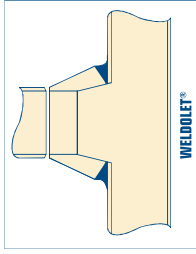

WELDOLET®



WELDING SADDLE


2

Wherever reinforced branches (saddles, reinforcing pads) are required by internal pressure-temperature conditions, external forces or both - an integrally reinforced Weldolet should be used.

- a. The Weldolet fitting facilitates fabrication and reduces cost. **(No chipping, less cutting and welding)**
- b. The Weldolet provides a perfectly contoured internal joint.
- c. The Weldolet fully integrates branch reinforcement and header, avoids metal to metal lapped surfaces and sharp re-entrant corners.



WHEN, WHERE & WHY TO USE WELDOLET® WELDING FITTINGS



USE THE WELDOLET®


Where improved flow is desirable, the funneled inlet provides full fluid flow, short height of fitting provides accessibility for internal grinding and inspection, where piping will be subjected to vibrational and/or other external stresses, wide footing improves mechanical strength and provides rugged construction. Tapered transition from branch to header and thick juncture relieve stress concentrations, and the funneled inlet relieves stress concentrations.

3


Wherever a non-reinforced miter-branch is satisfactory to withstand the internal pressure-temperature requirements, other factors point to the advisable use of the Weldolet fittings as follows:

DESIGN AND CONSTRUCTION with butt weld, socket or threaded outlets also precludes faulty fabrication with attendant inferior operation as shown below:


The human element has and will continue to cause this type of improper construction which cannot be readily prevented by inspection. Use of Weldolet fittings assures full fluid flow.



ROUGH CUT results in weld metal projecting into the system and retarding flow.





BRANCH PIPE PROJECTING down into header pipe drastically reduces flow and can plug entire system.



THE BRANCH CONNECTION IS THE FULCRUM OF MECHANICAL MOVEMENT. Vibration, expansion, contraction, fluid pulsation, and impact are all concentrated at this critical point.

PRECAUTION against external stresses must be considered particularly where failure would be hazardous to personnel or equipment. Unreinforced mitered branches cannot be relied upon when these stresses are anticipated. Weldolet fittings assure proper mechanical strength.



WHENEVER INSPECTION OF THE INSIDE OF THE BRANCH WELD IS NECESSARY (AS IN THE ASME UNFIRE PRESSURE VESSEL CODE) OR BACKWELDING IS REQUIRED (AS IS SOMETIMES REQUIRED IN THE ASME POWER BOILER CODE) THE WELDOLET SHOULD BE USED.



Quality Control

NUTECH OVERSEAS craftsmanship is combined with rigid quality control systems to provide complete assurance of the highest manufacturing standards and compliance with applicable ASME and ASTM specifications. Every fitting manufactured is subjected to three separate quality control systems: one for material control, one for manufacturing control, and one for design control.

All forgings are inspected before being passed to the shipping room. Frequent analyses are made to check against mill documents. Accurate records are kept of every fitting, from initial forging bar through forging, heat treatment, machining, storage and shipment. Every single fitting is traceable to the exact material and process used in its manufacture.

Research

Rather than blindly following the results of tests on branch connections by others and applying them to the Weldolet®, NUTECH OVERSEAS performed the necessary basic research and applied it directly to the Weldolet® and Sweepolet® type of construction. By ultra-precise use of stress coat, monitored by strain gauges, NUTECH OVERSEAS has obtained the effect of an infinite number of strain gauges. Starting with unreinforced branch connections, and testing a large number of sizes, size combinations and weights, NUTECH OVERSEAS scientifically observed and developed patterns of the areas of stress concentrations as well as the areas having less than an average stress.

As a result of a continuing program of testing over the years, the Weldolet and the Sweepolet have undergone design revisions to keep pace with the changing needs of the piping industry. The most modern research techniques are used including stress analyses by means of three-dimensional photoelasticity. The modern Weldolet and Sweepolet provides the best engineered method of fabricating a branch connection of carbon steel, stainless, alloy and high yield transmission pipe, in all pipe wall thicknesses. The Sweepolet is the recommended branch connection for Class I (critical service) nuclear piping.

Temperature - Pressure Ratings

THE WELDOLET PROVIDES 100% PIPE STRENGTH FOR ALL SIZES, WEIGHTS AND SCHEDULES.

Weldolet Welding Fittings are rated the same as seamless steel pipe. These ratings are based on the ASME Codes for Pressure Piping. For example, an extra strong Weldolet used on extra strong pipe of the equivalent material provides 100% pipe strength. Likewise, a standard weight Weldolet has the same ratings as standard weight pipe and provides 100% pipe strength when used on standard weight pipe.

Weldolet Welding Fittings are manufactured according to the requirements of the ASME B16.9 Standard for Steel Butt-Welding Fittings. Weldolets are designed so that their actual bursting strength when installed as recommended exceeds the computed bursting strength of the pipe of the designated weight or schedule number and material. Header assemblies with full size and reducing branches constructed with Weldolet welding fittings tested in accordance with the provisions of ASME B16.9 in all cases burst in the header pipe well above the computed minimum bursting strength of the straight run of unpenetrated pipe.



How To Order Branch Connections

1. Specify Size

 - Outlet size
 - Run or Header (or Run Size Combination, see pages 38 - 40)
2. Specify Style

Olet®
 - Butt-weld (Weldolet®)
 - Threaded (Threadolet®)
 - Socket-weld (Socketolet®)
 - Other (Etoilet®, Letrolet®, Sweepolet®, Insert Weldolet®, Nipolet®, etc.)

Headerlet™
 - Buttweld
 - Threaded
 - Socket-weld
3. Indicate Class or Schedule/Pipe Wall

 - Class 3000, 6000 - Threaded or Socket-weld
 - STD, XSTG, S160, etc. - Butt-welded
4. Select Material

 - Carbon Steel - SAA105 SAA105N - SAA350-LF2, etc.
 - Stainless Steels
 - Other
5. Specify Design Code (if available)

Examples - Quantity - Description - Material
 - 10 pieces - 8 x 4 Weldolet® - STD Wt. SAA105
 - 5 pieces - 36 - 6 x 1-1/2 Floolet™ - 3M Threaded - SAA105

How To Specify Branch Connections

Generally the schedules of the run pipe and branch pipe are identical and thus specification of the equivalent schedule Weldolet assures the proper fitting being used.

- Example:

16" Standard weight x 6" Standard weight is specified as a 6" standard weight fitting.

Where the schedule of the run is greater or less than the schedule of the branch, it is essential that both schedules be specified since (a) The Weldolet's reinforcing characteristics are a function of the run pipe wall thickness, which in turn designates the schedule of the basic Weldolet® fitting to be used; (b) The wall thickness of the outlet or branch end must match the wall thickness of the branch pipe.
- Example:

16" Extra strong x 6" Standard weight

16" Standard weight x 6" Extra strong

Special care is suggested to avoid confusing schedule 40 and standard weight as being identical (above 10" schedule 40 is heavier) and schedule 80 and extra strong (above 8" schedule 80 is heavier).
- Example:

8" Schedule 80 x 4" Schedule 80 fitting or extra strong fitting.

18" Schedule 80 x 4" Schedule 80 is a considerably heavier fitting, because the reinforcement is for 18" schedule 80 pipe with a wall thickness of approximately 1". The Weldolet® is available in standard code designs for all combinations of run wall thicknesses up through 3 1/2" thickness and branch wall thicknesses up through double extra strong. Designs for thicknesses greater than these can be developed on request.

How to Specify Branch Connections With Special Bores

When run size is standard weight and the branch is standard weight, - specify as standard weight. When run is standard weight and branch size is bored for a schedule less than standard weight - specify and price as standard weight plus special bore. When run size is extra strong weight and the branch is extra strong weight - specify and price as extra strong. When run size is extra strong weight and the branch is bored for a schedule less than extra strong weight - specify as extra strong plus special bore. When run size is schedule 160 weight and the branch is schedule 160 weight and the branch is schedule 160 weight - specify and price as schedule 160. When the run size is schedule 160 weight and the branch is bored for a schedule less than schedule 160 - specify as schedule 160 plus special bore. For 12" and larger run sizes with wall thicknesses heavier than schedule 160 - specify Heavy Wall Weldolets as shown on page 14.

When ordering include the following information:

Examples:

Quantity	Size	Description	Material
30	6 x 6	Weldolet®, Standard Weight	Carbon Steel
2	16 x 4	Weldolet®, Sch 100 x Sch 40	F22
30	2 x 2	Socketlet® Class 3000	304 S.S.
25	10-3 x 3/4	Threadlet® Class 6000	Carbon Steel


Note - Material of Olet™ Fittings should be the same as material of header.



REDUCING AND FLAT SIZE

STANDARD WEIGHT, RUN AND BRANCH


FORGED

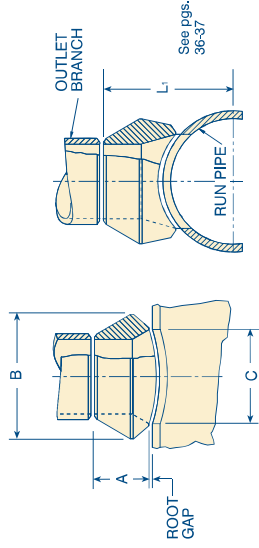

SIZE ON SIZE

STANDARD WEIGHT, RUN AND BRANCH

FORGED

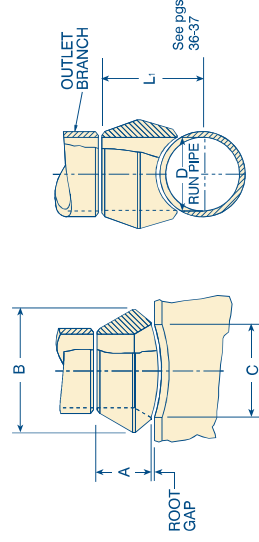

Design per MSS SP-97
BW ends per B16.9 and B16.25
Each outlet size listed is available to fit any run curvature.

Outlet Size Inches	Dimensions			Approx. Weight Pounds
	A	B	C	
1/8	5/8	1	5/8	.10
1/4	5/8	1	5/8	.10
3/8	1-1/4	1-1/4	3/4	.15
1/2	3/4	1-3/8	15/16	.20
3/4	7/8	1-3/4	1-3/16	.25
1	1-1/16	2-1/8	1-7/16	.50
1-1/4	1-1/4	2-9/16	1-3/4	.80
1-1/2	1-5/16	2-7/8	2	1.00
2	1-1/2	3-1/2	2-9/16	1.75
2-1/2	1-5/8	4-1/16	3	2.50
3	1-3/4	4-13/16	3-11/16	4.00
3-1/2	1-7/8	5-1/4	4	5.50
4	2	6	4-3/4	6.30
5	2-1/4	7-1/16	5-9/16	10.25
6	2-3/8	8-3/16	6-11/16	12.00
8	2-3/4	10-1/4	8-11/16	23.00
10	3-1/16	12-11/16	10-13/16	36.00
12	3-3/8	14-7/8	12-13/16	59.00
14	3-1/2	16-9/16	14-1/16	66.00
16	3-11/16	18-1/4	16-1/16	75.00
18	3-13/16	21-1/16	18-1/16	97.00
20	4	23-3/16	20	118.00
24	4-9/16	27-3/4	24-3/16	220.00
26	4-11/16	29-7/8	26-1/4	265.00
30	5-3/8	34-1/2	30-7/16	430.00
36	5-3/8	40-1/2	36-1/2	900.00

Although every attempt has been made to ensure that the information contained in these tables is correct, NUTECH OVERSEAS reserves the right to change the "B" and "C" dimension as deemed necessary.



Design per MSS SP-97
BW ends per B16.9 and B16.25
Each outlet size listed is available to fit any run curvature.

Outlet Size Inches	Dimensions			Approx. Weight Pounds
	A	B	C	
1/2	3/4	1-3/8	15/16	.15
3/4	7/8	1-5/8	1-3/16	.25
1	1-1/16	2-1/8	1-7/16	.40
1-1/4	1-1/4	2-3/8	1-3/4	.70
1-1/2	1-5/16	2-7/8	2	.80
2	1-1/2	3-1/2	2-9/16	1.50
2-1/2	1-5/8	4-1/16	3	2.25
3	1-3/4	4-13/16	3-11/16	3.75
3-1/2	2	5-3/8	3-7/8	5.00
4	2	6	4-3/4	6.70
5	2-1/4	7-1/8	5-9/16	8.50
6	2-3/8	7-3/4	6-11/16	14.00
8	2-3/4	10-3/8	8-11/16	28.00
10	3-1/16	13	10-13/16	39.00
12	3-3/8	15-1/4	12-13/16	65.00
14	3-1/2	16-1/2	14-1/16	70.00
16	3-11/16	18-7/8	16-1/16	92.00
18	4-1/16	20-3/4	18-5/8	125.00
20	4-5/8	23-1/16	20-1/16	175.00
24	5-3/8	27-7/8	25-1/8	280.00
30	5-3/8	34-1/16	30-7/16	440.00
36	5-3/8	40-1/2	36-1/2	1180.00

RUN PIPE SIZES

SCHEDULES

FLATS

ORDERING

Outlet sizes 6" and less fit a number of run pipe sizes, and the fittings are marked accordingly. See page 38 for run pipe size combination table(s).
Standard weight fittings are the same as schedule 40 fittings through 10".
Pipe schedule numbers and weight designations are in accordance with ASME B36.10.
A schedule 40 Weldolet for sizes 12" and larger is available.
A flat Weldolet for use on welding caps, elliptical heads and flat surfaces is available.
When ordering a Weldolet fitting, see page 7.


Although every attempt has been made to ensure that the information contained in these tables is correct, NUTECH OVERSEAS reserves the right to change the "B" and "C" dimension as deemed necessary.



REDUCING AND FLAT SIZE

EXTRA STRONG, RUN AND BRANCH

FORGED

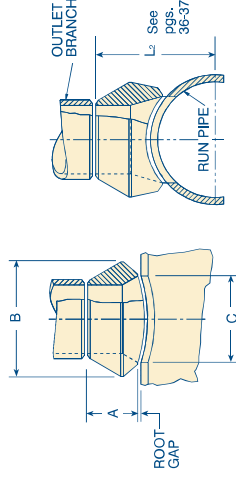

Design per MSS SP-97

BW ends per B16.9 and B16.25

Each outlet size listed is available to fit any run curvature.


Although every attempt has been made to ensure that the information contained in these tables is correct, NUTECH OVERSEAS reserves the right to change the "B" and "C" dimension as deemed necessary.



SIZE ON SIZE

EXTRA STRONG, RUN AND BRANCH

FORGED

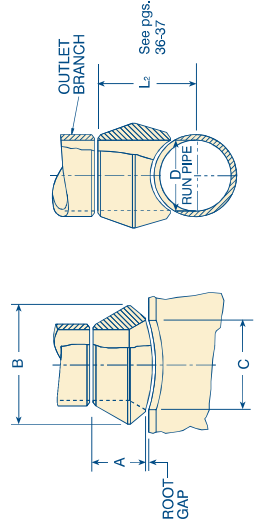

Design per MSS SP-97

BW ends per B16.9 and B16.25

Each outlet size listed is available to fit any run curvature.

Outlet sizes 6" and less fit a number of run pipe sizes, and the fittings are marked accordingly. See page 38 for run pipe size combination table(s).
Extra strong fittings are the same as schedule 80 through 8". Pipe schedule numbers and weight designations are in accordance with ASME B36.10. A schedule 80 Weldolet for sizes 10" and larger is available. Dimensions and prices on application.
A flat Weldolet for use on welding caps, elliptical heads and flat surfaces is available.
When ordering a Weldolet fitting, see page 7.

Although every attempt has been made to ensure that the information contained in these tables is correct, NUTECH OVERSEAS reserves the right to change the "B" and "C" dimension as deemed necessary.

Outlet Size Inches	Dimensions				Appx. Weight Pounds
	A	B	C	D	
1/2	3/4	1-3/8	15/16	5/8	.15
3/4	7/8	1-5/8	1-3/16	13/16	.25
1	1-1/16	2-1/8	1-7/16	1-1/32	.40
1-1/4	1-1/4	2-7/16	1-3/4	1-3/8	.70
1-1/2	1-5/16	2-7/8	2	1-5/8	.90
2	1-1/2	3-1/2	2-9/16	2-1/16	1.60
2-1/2	1-5/8	4-1/16	3	2-7/16	2.50
3	1-3/4	4-13/16	3-11/16	3-1/16	4.10
3-1/2	2	5-1/4	3-7/8	3-9/16	5.10
4	2	6	4-3/4	4	7.50
5	2-1/4	7-1/8	5-9/16	5-1/16	9.50
6	3-1/16	8-5/16	6-11/16	6-1/16	15.00
8	3-7/8	10-5/8	8-11/16	7-5/8	32.00
10	3-1/2	13-1/8	10-7/16	9-3/4	46.00
12	3-15/16	15-3/16	13	11-3/4	61.00
14	4-1/8	16	13	13	75.00
16	4-7/16	18-1/4	15	15	115.00
18	4-11/16	20-3/8	17	17	130.00
20	5	22-5/8	19	19	187.00
24	5-1/2	28-3/4	25-1/8	23	316.00
26	5-3/4	30-1/8	27-1/4	25	370.00
30, 36 and larger sizes available on application.					




REDUCING AND FLAT SIZE

SCHEDULE 160 & DOUBLE EXTRA STRONG

RUN AND BRANCH

FORGED

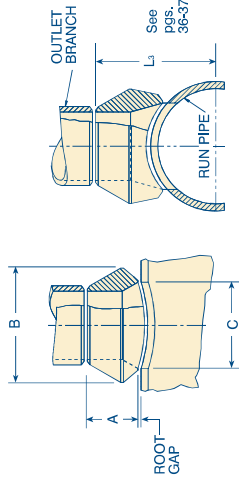

Design per MSS SP-97
BW ends per B16.9 and B16.25
Each outlet size listed is available to
fit any run curvature.

Outlet Size Inches	Dimensions			Appx. Weight Pounds
	A	B	C	
1/2	1-1/8	1-3/8	9/16	.25
3/4	1-1/4	1-3/4	3/4	.70
1	1-1/2	2	1	.85
1-1/4	1-3/4	2-7/16	1-5/16	1.25
1-1/2	2	2-3/4	1-1/2	1.75
2	2-3/16	3-3/16	1-11/16	2.15
2-1/2	2-7/16	3-13/16	2-1/8	3.40
3	2-7/8	4-3/4	2-7/8	6.30
4	3-5/16	6	3-7/8	10.50
5	3-11/16	7-3/8	4-13/16	14.25
6	4-1/8	9-5/16	5-3/4	28.00
8				
10				
12				
14				
16				
18				
24				

For dimensions see Heavy Wall Weldolet, page 14.

Larger outlet sizes available on application.

Although every attempt has been made to ensure that the information contained in these tables is correct, NUTECH OVERSEAS reserves the right to change the "B" and "C" dimension as deemed necessary.




SIZE ON SIZE

SCHEDULE 160 & DOUBLE EXTRA STRONG

RUN AND BRANCH

FORGED

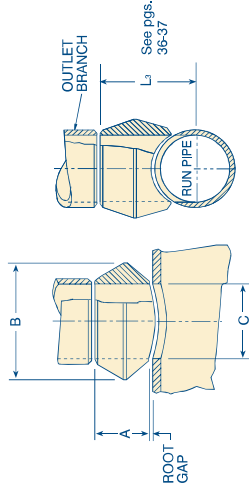

Design per MSS SP-97
BW ends per B16.9 and B16.25
Each outlet size listed is available to
fit any run curvature.

Outlet Size Inches	Dimensions			Appx. Weight Pounds
	A	B	C	
1/2	1-1/8	1-3/8	9/16	.25
3/4	1-1/4	1-3/4	3/4	.70
1	1-1/2	2	1	.80
1-1/4	1-3/4	2-7/16	1-5/16	1.25
1-1/2	2	2-3/4	1-1/2	1.75
2	2-3/16	3-3/16	1-11/16	2.15
2-1/2	2-7/16	3-13/16	2-1/8	3.40
3	2-7/8	4-3/4	2-7/8	6.35
4	3-5/16	6	3-7/8	10.50
5	3-11/16	7-3/8	4-13/16	14.25
6	4-1/8	8-11/16	5-3/4	30.25
8				
10				
12				
14				
16				
18				
20				
24				

For dimensions see Heavy Wall Weldolet, page 14.

RUN PIPE SIZES


Outlet sizes 4" and less fit a number of run pipe sizes, and the fittings are marked accordingly. See page 38 for run pipe size combination table(s).
FLATS
A flat Weldolet for use on welding caps, elliptical heads and flat surfaces is available.
ORDERING
When ordering a Weldolet fitting, see page 7.

Although every attempt has been made to ensure that the information contained in these tables is correct, NUTECH OVERSEAS reserves the right to change the "B" and "C" dimension as deemed necessary.




HEAVY WALL


FORGED



The Heavy Wall Forged Weldolet® is an integrally reinforced branch connection. It provides the economical and engineering answer to the problem of welding outlet fittings on high pressure, high temperature piping and pressure vessels.

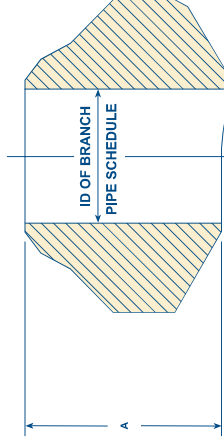

TYPE 1

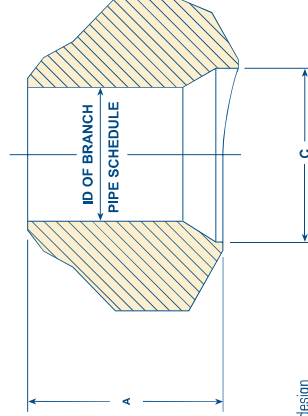

TYPE 2

Type 1 - Straight thru bore design



Type 2 - Conventional tapered bore design

Run Wall Thickness	3/4	1	1-1/4	2	2-1/4	2-1/2	2-3/4	3
Branch Pipe Size	A	C	A	C	A	C	A	C
3	2-7/8	2-9/16	5-7/32	2-9/16	5-3/8	2-9/16	5-7/8	2-9/16
4	3-1/8	3-3/8	3-7/16	3-3/8	3-3/4	3-3/8	3-3/4	3-3/8
5	3-9/16	3-8/16	3-1/2	3-8/16	3-1/2	3-8/16	3-1/2	3-8/16
6	4-1/8	4-1/2	4-1/4	4-1/2	4-1/4	4-1/2	4-1/4	4-1/2
8	4-3/16	4-5/8	4-7/8	4-5/8	4-7/8	4-5/8	4-7/8	4-5/8
10	4-1/4	4-3/4	4-7/8	4-3/4	4-7/8	4-3/4	4-7/8	4-3/4
12	4-3/8	4-1/2	4-3/4	4-1/2	4-3/4	4-1/2	4-3/4	4-1/2
14	4-1/2	4-3/4	4-7/8	4-3/4	4-7/8	4-3/4	4-7/8	4-3/4
16	4-1/2	4-3/4	4-7/8	4-3/4	4-7/8	4-3/4	4-7/8	4-3/4
18	4-1/2	4-3/4	4-7/8	4-3/4	4-7/8	4-3/4	4-7/8	4-3/4
20	4-1/2	4-3/4	4-7/8	4-3/4	4-7/8	4-3/4	4-7/8	4-3/4
24	4-1/2	4-3/4	4-7/8	4-3/4	4-7/8	4-3/4	4-7/8	4-3/4



CL 3000

CL 6000



REDUCING SIZES

Design per MSS-SP 97
Threaded ends are
in accordance with
ANSI/ASME B1.20.1
Each outlet size
listed is available to
fit any run curvature.

Outlet Size Inches	A	B	C	Approx. Weight Pounds
1/8	3/4	1	5/8	.10
1/4	3/4	1	5/8	.10
3/8	13/16	1-1/4	3/4	.20
1/2	1	1-7/16	15/16	.25
3/4	1-1/16	1-3/4	1-3/16	.35
1	1-5/16	2-1/8	1-7/16	.60
1-1/4	1-5/16	2-9/16	1-3/4	.90
1-1/2	1-3/8	2-7/16	2	1.00
2	1-1/2	3-1/2	2-9/16	1.75
2-1/2	1-13/16	4-1/16	3	3.00
3	2	4-13/16	3-11/16	4.35
3-1/2	2-1/8	5-1/4	4	5.75
4	2-1/4	6	4-3/4	7.10
5	2-5/8	7-5/16	5-9/16	12.00
6	2-3/4	8-5/8	6-11/16	15.30
1/4	1-1/8	1-3/8	9/16	.30
3/8	1-1/8	1-3/8	9/16	.30
1/2	1-1/4	1-3/4	3/4	.45
3/4	1-7/16	2	1	.75
1	1-9/16	2-7/16	1-5/16	1.25
1-1/4	1-5/8	2-3/4	1-1/2	1.60
1-1/2	1-11/16	3-1/4	1-15/16	1.95
2	2-1/16	4-1/16	2-3/4	5.00

SIZE ON SIZE

Outlet Size Inches	A	B	C	D	Approx. Weight Pounds
1/2	1	1-3/8	15/16	5/8	.15
3/4	1-1/16	1-11/16	1-3/16	13/16	.25
1	1-5/16	2-1/8	1-7/16	1-1/16	.45
1-1/4	1-5/16	2-3/8	1-3/4	1-3/8	.70
1-1/2	1-3/8	2-7/8	2	1-5/8	.90
2	1-1/2	3-1/2	2-9/16	2-1/16	1.40
2-1/2	1-15/16	4-1/16	3	2-1/2	2.50
3	2	4-13/16	3-11/16	3-1/16	4.30
3-1/2	2-1/8	5-3/8	4-7/16	3-9/16	4.50
4	2-1/4	6	4-3/4	4-7/16	6.80
5	2-7/16	7-1/4	5-1/4	5-1/4	9.20
6	2-3/4	8-11/16	5-3/4	5-3/4	15.70

Although every attempt has been made to ensure that the information contained in these tables is correct, WELDOLET OVERSEAS reserves the right to change the "B" and "C" dimension as deemed necessary.

RUN PIPE SIZES Outlet sizes noted above fit a number of run pipe sizes, and the fittings are marked accordingly.

See page 38 for run pipe size combination table(s).

A flat Thredolet for use on welding caps, elliptical heads and flat surfaces is available.

When ordering a Thredolet fitting, see page 7.



SOCKOLET

REDUCING, SIZE ON SIZE AND FLAT




FLEXOLET SA/A105 & SA/A350 LF2 CL1

CL 3000

CL 6000



Design per MSS-SP 97
Socket Dimensions comply with
ASME B16.11
Each outlet size listed is available to
fit any run curvature.

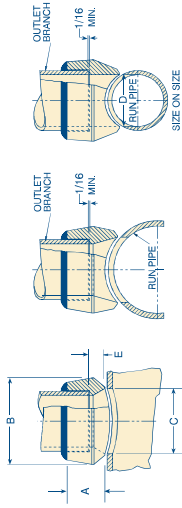

REDUCING SIZES

Outlet Size Inches	Dimensions					Appx. Weight Pounds	
	A	B	C	D	E		
CL 3000	1/8	3/4	1	5/8	.269	5/16	.10
	1/4	3/4	1	5/8	.364	5/16	.10
	3/8	13/16	1-1/4	3/4	.493	7/16	.20
	1/2	1	1-7/16	15/16	.622	9/16	.30
	3/4	1-1/16	1-3/4	1-3/16	.824	9/16	.35
	1	1-5/16	2-1/8	1-7/16	1.049	13/16	.60
	1-1/4	1-5/16	2-9/16	1-3/4	1.380	3/4	.85
	1-1/2	1-3/8	2-7/8	2	1.610	3/4	1.00
	2	1-1/2	3-1/2	2-9/16	2.067	13/16	1.60
	2-1/2	1-9/16	4-1/16	3	2.469	3/4	2.75
CL 6000	3	1-3/4	4-13/16	3-11/16	3.068	15/16	3.80
	3-1/2	2-1/8	5-3/8	4	3.548	1	4.30
	4	1-7/8	6	4-3/4	4.026	1-1/16	7.25
	5	2-5/8	7	5-9/16	5.047	1-3/8	12.00
	6	2-3/4	8-5/8	6-11/16	6.065	1-7/16	14.50
	1/2	1-1/4	1-3/4	3/4	.466	7/8	.50
CL 9000	3/4	1-7/16	2	1	.614	7/8	.80
	1	1-9/16	2-7/16	1-5/16	.815	15/16	1.30
	1-1/4	1-5/8	2-3/4	1-1/2	1.160	13/16	1.60
	1-1/2	1-11/16	3-1/4	1-15/16	1.338	7/8	2.00
	2	2-1/16	4-1/16	2-3/4	1.689	1-3/16	5.15
	2-1/2	2-1/2	5-1/2	4-1/2	3.500	1-1/2	10.00

SIZE ON SIZE

CL 3000	Outlet Size		Dimensions				Appx. Weight Pounds
	Inches	A	B	C	D	E	
	1/2	1	1-3/8	15/16	.622	9/16	.15
	3/4	1-1/16	1-5/8	1-3/16	.824	1/2	.25
	1	1-5/16	2	1-7/16	1.049	3/4	.45
	1-1/4	1-5/16	2-3/8	1-3/4	1.380	9/16	.65
	1-1/2	1-3/8	2-7/8	2	1.610	11/16	.85
	2	1-1/2	3-1/2	2-9/16	2.067	15/16	1.40
	2-1/2	1-9/16	4-1/16	3	2.469	3/4	2.25
	3	1-3/4	4-13/16	3-11/16	3.068	15/16	3.75
3-1/2	1-11/16	5-3/8	4-7/16	3.548	11/16	4.30	
4	1-7/8	6-1/16	4-3/4	4.026	1-1/16	6.60	
5	2-7/16	7-1/4	5-1/4	5.047	1	9.00	
6	2-11/16	8-11/16	6-1/16	6.065	1-3/16	15.50	

Although every attempt has been made to ensure that the information contained in these tables is correct, NUTECH OVERSEAS reserves the right to change the "B" and "C" dimension as deemed necessary.

Outlet sizes noted above fit a number of run pipe sizes, and the fittings are marked accordingly. See page 38 for run pipe size combination table(s).
A flat Socketlet for use on welding caps, elliptical heads and flat surfaces is available.
When ordering a Socketlet fitting, see page 7.

FLATS
ORDERING

16


BUTT WELDED

STANDARD WEIGHT

EXTRA STRONG



Design per MSS-SP-97
BW End per B16.9 & B16.25
Each outlet size listed is available
to fit any run curvature.

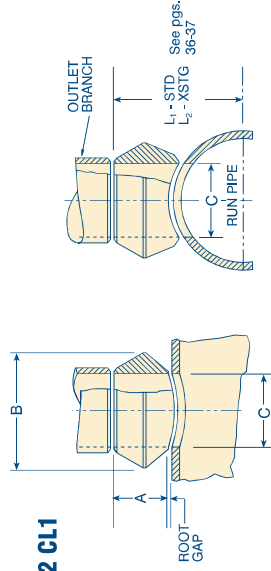

Outlet Size Inches	Dimensions			Appx. Weight Pounds
	A	B	C	
3/8	3/4	1	0.493	0.10
1/2	3/4	1-1/8	0.622	0.12
3/4	7/8	1-1/2	0.824	0.22
1	1-1/16	1-13/16	1.062	0.32
1-1/4	1-1/4	2-1/4	1.38	0.64
1-1/2	1-5/16	2-9/16	1.625	0.78
2	1-1/2	3	2.062	1.14
2-1/2	1-5/8	3-11/16	2.500	1.94
3	1-3/4	4-5/16	3.125	2.60
4	2	5-3/8	4.145	4.12
6	2-3/8	7-11/16	6.112	11.00

Outlet Size Inches	Dimensions			Appx. Weight Pounds
	A	B	C	
3/8	3/4	1	0.423	0.10
1/2	3/4	1-1/8	0.546	0.12
3/4	7/8	1-1/2	0.742	0.18
1	1-1/16	1-13/16	1.062	0.36
1-1/4	1-1/4	2-1/4	1.278	0.55
1-1/2	1-5/16	2-9/16	1.625	0.68
2	1-1/2	3	2.062	1.24
2-1/2	1-5/8	3-11/16	2.500	2.26
3	1-3/4	4-5/16	3.125	2.84
4	2	5-3/8	4.145	4.56
6	2-3/8	7-3/4	5.800	15.00

Although every attempt has been made to ensure that the information contained in these tables is correct, NUTECH OVERSEAS reserves the right to change the "B" and "C" dimension as deemed necessary.

Outlet sizes 6" and less fit a number of run pipe sizes, and the fittings are marked accordingly. See page 39 for run pipe size combination table(s).
Standard Weight Fittings are the same as schedule 40 fittings through 10".
A schedule 40 butt-welded Flexolet for sizes 12" and larger is available.
Dimensions and prices on application.

SCHEDULES

Extra Strong Fittings are the same as schedule 80 fittings through 6". A schedule 80 butt-welded Flexolet for sizes 10" and larger is available. Dimensions and prices on application. Pipe schedule numbers and weight designations are in accordance with ASME B36.10.

FLATS
Flat butt-welded Flexolet fittings for use on welding caps, elliptical heads and flat surfaces is available.

ORDERING
When ordering a Flexolet fitting, see page 7.

17





FLEXOLET

SA/A105 & SA/A350 LF2 CL1

THREADED

CL 3000

CL 6000



Outlet Size Inches	Dimensions			Appx. Weight Pounds
	A	B	C	
1/4	3/4	1-1/16	.437	0.14
3/8	13/16	1-1/16	.578	0.14
1/2	1	1-1/2	.718	0.28
3/4	1-1/16	1-11/16	.922	0.39
1	1-5/16	2-1/8	1.156	0.73
1-1/4	1-5/16	2-1/2	1.500	0.96
1-1/2	1-3/8	2-13/16	1.734	1.12
2	1-1/2	3-5/16	2.218	1.66
2-1/2	1-13/16	3-15/16	2.625	2.73
3	2	4-5/8	3.250	3.88
4	2-1/4	5-13/16	4.250	6.18



Design per MSS SP-97
Threaded Ends comply with ASME B1.20.1
Each outlet size listed is available to fit
any run curvature.



Design per MSS SP-97
Socket Dimensions comply with
ASME B16.11
Each outlet size listed is available to
fit any run curvature.





FLEXOLET

A/A105 & SA/A350 LF2 CL1

SOCKET WELDED

CL 3000

CL 6000



Outlet Size Inches	Dimensions			Appx. Weight Pounds	
	A	B	C		
1/4	3/4	1	0.364	3/8	0.14
3/8	13/16	1-1/16	0.493	7/16	0.14
1/2	1	1-1/2	0.622	9/16	0.28
3/4	1-1/16	1-11/16	0.824	9/16	0.39
1	1-5/16	2-1/8	1.049	13/16	0.73
1-1/4	1-5/16	2-9/16	1.38	3/4	0.96
1-1/2	1-3/8	2-13/16	1.61	3/4	1.12
2	1-1/2	3-5/16	2.067	13/16	1.66
2-1/2	1-13/16	3-13/16	2.469	3/4	2.73
3	2	4-11/16	3.068	15/16	3.88
4	2-1/4	5-13/16	4.026	1-1/16	6.60

Outlet Size Inches	Dimensions				Appx. Weight Pounds
	A	B	C	E	
1/2	1-1/4	1-3/4	.464	13/16	0.28
3/4	1-7/16	2-1/16	.612	15/16	0.39
1	1-9/16	2-9/16	.815	1	0.73
1-1/4	1-5/8	2-1/2	1.160	1	0.96
1-1/2	1-11/16	3-5/16	1.338	1-1/16	1.63
2	2-1/16	4	1.687	1-3/8	1.66

Although every attempt has been made to ensure that the information contained in these tables is correct, NUTCH OVERSEAS reserves the right to change the "B" and "C" dimension as deemed necessary.

RUN PIPE SIZES Outlet sizes noted above fit a number of run pipe sizes, and the fittings are marked accordingly. See page 39 for run pipe size combination table(s).
FLATS A flat Socket-welded Flexolet for use on welding caps, elliptical heads and flat surfaces is available.
ORDERING When ordering a Flexolet fitting, see page 7.



FLEXOLET STAINLESS & ALLOY



BUTT WELDED

STANDARD WEIGHT

EXTRA STRONG



Design per MSS-SP 97
BW End per B16.9 & B16.25
Each outlet size listed is available to fit
any run curvature.



See pgs.
36-37

Outlet Size Inches	Dimensions			Approx. Weight Pounds
	A	B	C	
3/8	3/4	1	0.493	0.09
1/2	3/4	1-1/8	0.622	0.12
3/4	7/8	1-1/2	0.824	0.28
1	1-1/16	1-3/4	1.049	0.34
1-1/4	1-1/4	2-1/4	1.38	0.72
1-1/2	1-5/16	2-1/2	1.610	0.90
2	1-1/2	3	2.067	1.12
2-1/2	1-5/8	3-5/8	2.469	2.31
3	1-3/4	4	3.068	2.50
4	2	5	4.026	5.89
6	2-3/8	7-1/2	6.065	10.50

Outlet Size Inches	Dimensions			Approx. Weight Pounds
	A	B	C	
3/8	3/4	1	0.423	0.15
1/2	3/4	1-1/8	0.546	0.12
3/4	7/8	1-1/2	0.742	0.21
1	1-1/16	1-3/4	0.957	0.43
1-1/4	1-1/4	2-1/4	1.278	0.69
1-1/2	1-5/16	2-1/2	1.500	0.89
2	1-1/2	3	1.939	1.25
2-1/2	1-5/8	3-1/2	2.323	2.63
3	1-3/4	4	2.900	3.82
4	2	5	3.826	6.17
6	3-1/16	7-1/2	5.761	15.06

Although every attempt has been made to ensure that the information contained in these tables is correct, NUTECH OVERSEAS reserves the right to change the "B" and "C" dimension as deemed necessary.

Outlet sizes 6" and less fit a number of run pipe sizes, and the fittings are marked accordingly. See page 40 for run pipe size combination table(s).
Standard Weight Fittings are the same as schedule 40 fittings through 10".
A schedule 40 butt-welded Flexolet for sizes 12" and larger is available.
Dimensions and prices on application.

Extra Strong Fittings are the same as schedule 80 fittings through 8". A schedule 80 butt-welded Flexolet for sizes 10" and larger is available. Dimensions and prices on application. Pipe schedule numbers and weight designations are in accordance with ASME B36.10.

Flat butt-welded Flexolet fittings for use on welding caps, elliptical heads and flat surfaces is available.

FLATS

ORDERING

20



FLEXOLET STAINLESS & ALLOY



THREADED

CL 3000

CL 6000



Design per MSS-SP 97
Threaded ends are in accordance with
ANSI/ASME B1.20.1
Each outlet size listed is available to fit
any run curvature



Outlet Size Inches	Dimensions			Approx. Weight Pounds
	A	B	C	
1/4	3/4	7/8	.437	0.14
3/8	13/16	1	.578	0.14
1/2	1	1-1/4	.718	0.28
3/4	1-1/16	1-1/2	.922	0.39
1	1-5/16	1-7/8	1.156	0.73
1-1/4	1-5/16	2-1/4	1.500	0.96
1-1/2	1-3/8	2-1/2	1.734	1.12
2	1-1/2	3	2.218	1.66

Outlet Size Inches	Dimensions			Approx. Weight Pounds
	A	B	C	
1/4	1-1/8	1	.437	0.14
3/8	1-1/8	1-1/4	.578	0.14
1/2	1-1/4	1-1/2	.718	0.28
3/4	1-7/16	1-3/4	.922	0.39
1	1-9/16	2-1/4	1.156	0.73
1-1/4	1-5/8	2-1/2	1.500	0.96
1-1/2	1-11/16	3	1.734	1.63
2	2-1/16	3-5/8	2.218	1.66

Although every attempt has been made to ensure that the information contained in these tables is correct, NUTECH OVERSEAS reserves the right to change the "B" and "C" dimension as deemed necessary.

Outlet sizes noted above fit a number of run pipe sizes, and the fittings are marked accordingly. See page 40 for run pipe size combination table(s).
A flat, Threaded Flexolet for use on welding caps, elliptical heads and flat surfaces is available.

FLATS

ORDERING

When ordering a Flexolet fitting, see page 7.

21



FLEXOLET STAINLESS & ALLOY



SOCKET WELDED

CL 3000

CL 6000



Design per MSS-SP 97
Socket Dimensions comply with ASME B16.11
Each outlet size listed is available to fit any run
curvature.



Outlet Size Inches	Dimensions				Appx. Weight Pounds
	A	B	C	E	
1/4	3/4	7/8	0.364	3/8	0.14
3/8	13/16	1-1/16	0.493	7/16	0.14
1/2	1	1-1/4	0.622	9/16	0.28
3/4	1-1/16	1-1/2	0.824	9/16	0.39
1	1-5/16	1-7/8	1.049	25/32	0.73
1-1/4	1-5/16	2-1/4	1.38	23/32	0.96
1-1/2	1-3/8	2-1/2	1.61	3/4	1.12
2	1-1/2	3	2.067	13/16	1.66

Outlet Size Inches	Dimensions				Appx. Weight Pounds
	A	B	C	E	
1/2	1-1/4	1-3/8	.464	13/16	0.28
3/4	1-7/16	1-3/4	.612	15/16	0.39
1	1-9/16	2	.815	1-1/32	0.73
1-1/4	1-5/8	2-1/2	1.16	1-1/32	0.96
1-1/2	1-11/16	2-3/4	1.338	1-1/16	1.63
2	2-1/16	3-3/8	1.687	1-3/8	1.66

Although every attempt has been made to ensure that the information contained in these tables is correct, NUTTECH OVERSEAS reserves the right to change the "B" and "C" dimension as deemed necessary.
Outlet sizes noted above fit a number of run pipe sizes, and the fittings are marked accordingly. See page 40 for run pipe size combination table(s).
A flat Socket-welded Hexolet for use on welding caps, elliptical heads and flat surfaces is available.
When ordering a Hexolet fitting, see page 7.

*Branch dimensions are in accordance with ASME B16.11 CL 3M.

Benefits

- Reduces Welding
- Reduces Header Weld Cross Section
- Reduces Heat Build Up
- Is Used on All Run Pipe Thicknesses & LW design can be used with any schedule or thickness run pipe in B16.5 Class 150 & Class 300 piping systems.
- Reduces weld volume and welding time by more than 50% compared to traditional designs.
- Allows full penetration groove welds without "suck in" or distortion.
- Reduces run pipe heat distortion.
- (CL300) SSs/10s & LW design can be used with any schedule or thickness run pipe in B16.5 Class 150 or Class 300 piping systems.
- Meets Piping Codes & Standards






FLEXOLET SCHEDULE SSs/10s & CL 300 LW

BUTT WELDED

THREADED

SOCKET WELDED



Outlet Size Inches	BUTT WELDED				THREADED*				SOCKET WELDED*			
	Dimensions		Appx. Wt/Lb	C	Dimensions		Appx. Wt/Lb	C	Dimensions		Appx. Wt/Lb	C
	A	B			A	B			A	B		
1/8	5/8	7/8										
1/4	5/8	7/8										
3/8	3/4	1										
1/2	3/4	1-1/8										
3/4	7/8	1-1/2										
1	1-1/16	1-3/4										
1-1/4	1-1/4	2-1/4										
1-1/2	1-5/16	2-1/2										
2	1-1/2	3										
2-1/2	1-5/8	3-3/8										
3	1-3/4	4										
3-1/2	1-7/8	4-1/2										
4	2	5										
5	2-1/4	6-1/16										
6	2-3/8	7-1/8										

Identification




Specify Butt-Weld as follows:
Light Wall x Branch Schedule:
Run Schedule x Branch Schedule:
CL300 x Branch Schedule:
Specify Socket-Weld & Threaded as follows:
Light Wall x Branch Class:
Run Wall x Branch Class:
LW**
CL300 x Branch Class:
Fittings designated CL300 can be installed on any run pipe thickness (S10s, Std, XS, S160, XXS) in B16.5 Class 150 or Class 300 Piping Systems.
**To obtain S10s/LW/CL300 design for run pipes thicker than S10s, either LW or CL300 must be specified.




LATROLET

45° CONNECTIONS

FORGED






45° BRANCH CONNECTIONS THREADED, SOCKET-WELD AND BUTT-WELD ENDS




ELBOLET

90° LONG RADIUS

FORGED



FOR ELBOW OUTLETS THREADED, SOCKET-WELD AND BUTT-WELD ENDS



Nominal Run Pipe Size	Outlet Size	Dimensions															
		CL 3000 Threaded and Socket-Weld				CL 6000 Threaded and Socket-Weld				STD & XS Butt-Weld				Sch. 160 and XS Socket-Weld			
		A	B	C	E	A	B	C	E	A	B	C	E	A	B	C	E
2-1/2 12	-1-1/4 -3	1-9/16	2-1/32	1-7/16	1-9/16	1-9/16	2-1/32	1-7/16	1-9/16	1-5/16	2-3/32	1-7/16	1-9/16	1-9/16	2-5/16	1-7/16	
2-1/2 12	-1-1/4 -3	1-9/16	2-1/32	1-7/16	1-9/16	1-9/16	2-1/32	1-7/16	1-9/16	1-5/16	2-3/32	1-7/16	1-9/16	1-9/16	2-5/16	1-7/16	
2-1/2 12	-1-1/4 -3	1-9/16	2-1/32	1-7/16	1-9/16				1-9/16	1-3/8	2-5/32	1-7/16	1-9/16				
1-1/2 5	-1-1/4 -2					1-7/8	2-3/4	1-3/4	1-29/32					1-13/16	2-3/4	1-3/4	
1-1/2 12	-1-1/4 -6	1-7/8	2-3/4	1-3/4	1-29/32					1-11/16	2-17/32	1-3/4	1-29/32				
2-1/2 12	-2 -6					2-3/16	3-1/4	2-1/8	2-3/16					2-1/8	3-1/4	2-1/8	
2-1/2 12	-2 -6																
2-1/2 12	-2 -6	2-3/16	3-1/4	2-1/8	2-3/16	2-1/2	3-21/32	2-5/8	2-15/32	1-31/32	3	2-1/8	2-3/16	2-1/2	3-13/16	2-5/8	
2-1/2 12	-2 -6	2-1/2	3-27/32	2-5/8	2-15/16	2-3/4	4-7/32	3-1/2	2-5/8	2-9/32	3-19/32	2-5/8	2-15/32	2-3/4	4-1/4	3	
2-1/2 12	-2 -6	2-1/2	3-27/32	2-5/8	2-15/16	2-3/4	4-7/32	3-1/2	2-5/8	2-9/32	3-19/32	2-5/8	2-15/32	2-3/4	4-1/4	3	
2-1/2 12	-2 -6	2-3/4	4-7/32	3-1/2	2-5/8					2-15/32	3-1/2	3-1/2	2-5/8				
5 8	-4 -6					3-3/8	5-7/16	4-1/8	3-5/32					3-3/8	5-3/8	4-1/8	
5 12	-4 -6									3-5/32	3-1/2	5-1/4	4-1/8				
5 12	-4 -6	3-3/8	5-7/16	4-1/8	3-5/32	3-3/8	5-7/16	4-1/8	3-5/32	3-1/2	5-1/4	4-1/8	3-13/32				
2-1/2 12	-2 -6									3-5/32	5-3/16	4-1/8	3-5/32				
Order to Specific Run Pipe Sizes	3									3-13/16	6-1/4	4-31/32	3-25/32				
4										4-3/4	7-13/16	6-7/16	4-9/16				

Also available for run sizes through 36".
X=(O.D.T+Root Gap)/.071+E
See footnotes at bottom of page 25.

Nominal Elbow Size Inches	Outlet Size Inches	Dimensions			
		CL 3000 Threaded & Socket-Weld Std. & XS Butt-Weld		CL 6000 Threaded & Socket-Weld Sch. 160 & XS Butt-Weld	
		C	E	C	E
36 - 3/4	1/4	1-1/2	1-19/32	1-1/2	1-19/32
36 - 3/4	3/8	1-1/2	1-19/32	1-1/2	1-19/32
36 - 3/4	1/2	1-1/2	1-19/32	1-23/32	1-7/8
36 - 1	3/4	1-23/32	1-7/8	2-1/4	2-1/4
36 - 2	1	2-1/4	2-1/4	2-7/8	2-1/2
36 - 2	1-1/4	2-7/8	2-1/2	3-1/8	2-11/16
36 - 2	1-1/2	3-1/8	2-11/16	4-3/16	3-1/4
36 - 3	2	4-3/16	3-1/4		
Order to Specific Elbow Sizes	**2-1/2	4-3/16	3-1/4		
	**3	5-1/16	3-7/8		
	**4	6-5/8	4-13/16		
	**6	9-3/8	6-1/2		
	**8	13-5/16	8-1/16		
	**10	17-1/32	10-3/8		
	**12	19-5/8	11-1/8		

Footnotes applying to the Elbolet and Latrolet:

Socket Dimensions to ASME B16.11

Thread Dimensions to ANSI/ASME B1.20.1

Butt-welding End Dimensions to ASME B16.9 & B16.25

Each Elbolet 2" & smaller is uniquely designed to fit all the elbow sizes shown. The complete size range interchangeability is so marked on the fitting.

**Available as Butt-Welding outlets only. Larger sizes available - STD/XS S160/XS.

ORDERING When ordering Elbolet/Latrolet fittings - see page 7.

* L = E + .071 + Root Gap



SWEEPPOLET

BACKGROUND

The piping industry has retained the theory of "area replacement" for adequate and acceptable branch pipe reinforcement and very little basic improvement in branch pipe construction has taken place or indeed seemed possible. Area replacement has been the only premise outlined by Code for adequate reinforcement: the Codes have not considered the shape of such reinforcement. It is evident that some shapes would be more efficient than others, and as a result more replacement area with a poor shape might be less satisfactory than less area with an appropriate shape.

The basic methods of lap type reinforcement outlined in Codes are known to have serious drawbacks. They have an inherent crack at the areas of high stress concentrations. They have an inherent crack at the inside edge of the fillet weld as well as points of high stress where the pad joins the run pipe and where the nozzle intersects the pad or run. These drawbacks are of increasing concern when high yield pipe is used and for other critical service applications such as nuclear. On softer materials such as Grade A or Grade B pipe the localized areas of high stress tend to be relieved by local yielding and generally do not adversely affect the serviceability of the joint unless cyclic loading is involved or there is a propensity for brittle fracture.

DESIGN

The Sweepolet® concept evolved from two premises, namely, reinforcement must be sufficient to limit deformations and that an efficient branch construction would result from controlling the geometry of the intersection on all planes.

A Sweepolet fitting provides the required stiffening (reinforcement at the most critical point, the juncture of the branch and header) with essentially no peak stresses. Owing to the aesthetic proportions of a Sweepolet, designers intuitively know that it is an efficient branch outlet construction - and tests have proved it! As a result of experimental stress analysis from brittle lacquer to sophisticated and accurate three-dimensional photostress, it has been shown that the Sweepolet embodies quantitatively all desirable features in their optimum relationship.

CODE COMPLIANCE

The Sweepolet is a contoured, integrally reinforced insert welding fitting developed by NUTECH OVERSEAS. They have been approved for all critical-service applications including Class 1 Nuclear piping.

The Codes have always anticipated the development of fittings such as our Sweepolet and approve their use. For example:

ASME B31.3, PROCESSING PIPING

Paragraphs 302.2, 304.3, 326 and 328.5.4 recognize and approve the use of special fittings.



SWEEPPOLET

FORGED

ASME B31.1, POWER PIPING
Paragraphs 102.2, 104.3, 126 and 127.4.8 similarly recognize and approve the use of special fittings.

ASME B31.4, Liquid Transportation Systems

Paragraphs 402.2, 404.3, 406.5, 426 similarly recognize and approve the use of special fittings.


ASME B31.8, Gas Transmission and Distribution Piping Systems
Paragraph 831.3 similarly recognize and approve the use of special fittings.

The Sweepolet complies with the requirements of ASME B16.9 "Factory-Made Wrought Steel Buttwelding Fittings" and therefore satisfies various sections of the above noted ASME Codes for Pressure Piping. Additionally, an examination of the drawings in this catalog and/or the fittings themselves, show the vast improvement in this design over any other type of piping branch construction for resisting stresses in high yield pipe. Testing and in-service applications have already proven the serviceability of our Sweepolet product line and due to the substantial cost savings gained by using Sweepolets, anyone concerned with critical piping systems should be interested in the use of this product.

RESEARCH & DEVELOPMENT

Ever since NUTECH OVERSEAS first began to question the basic premise of area replacement alone, intensive studies and research have been conducted by our engineers. It was soon found that the Pressure Vessel Industry was doing likewise. All signs of the Pressure Vessel Research Committee's work on branch connections, both published and unpublished, point to the general shape of the Sweepolet. In fact, two of the nationally recognized pressure vessel and piping codes now contain requirements as to "area placement" in addition to the long-standing requirement on "area replacement." In the meantime, the Sweepolet was independently conceived, developed, tested, sold and put into operation on pipelines, atomic reactor vessels, missile launching systems and numerous critical piping systems.

In general, NUTECH OVERSEAS' position is that shape influences the efficiency of reinforcement as much or more than area provided by the indiscriminate application of area replacement rules. The theorem has appeared in NUTECH OVERSEAS literature for years and has been the subject of many discussions with piping and pressure vessel designers during the last two decades. The question is: "What is the optimum shape and proper amount of reinforcement?" The answer is "Sweepolets! Experimental stress analyses, from brittle lacquer to sophisticated and accurate 3-dimensional photostress have shown that the Sweepolet embodies quantitatively all desirable features in the optimum relationship."

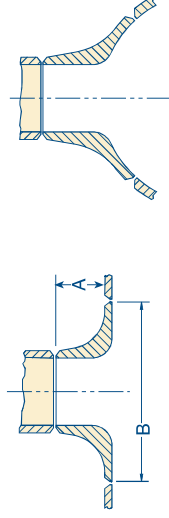

Run Size	Outlet Size	Dimensions	
		A*	B
6 to 36	1-1/4"	1-1/4"	4
6 to 36	1-1/2"	1-3/4"	5-1/2
6 to 36	2"	1-1/2"	5-1/2
6 to 36	3"	1-21/32"	7
6 to 36	4"	2-1/32"	8-3/4
10 to 36	6"	2-11/16"	13
12 to 36	8"	3	15
16 to 36	10"	3-1/8"	18-1/2
16 to 36	12"	3-5/16"	20-1/2
20 to 36	14"	3-5/8"	24
24 to 36	16"	3-3/4"	28
24 to 36	18"	4-5/8"	31
24 to 36	20"	5-1/8"	33
30 to 36	24"	5-5/8"	38

Forged Sweepolet fittings are available in outlet sizes for standard, extra strong and heavier run wall thicknesses. Inquiries are invited. Full size and first reduction Sweepolet are not manufactured.

SWEEPPOLET FITTINGS

Orders and inquiries should provide the following information.



- 1) Vessel/Header Size
- 2) Vessel/Header Wall Thickness
- 3) Branch Size
- 4) Branch Wall Thickness
- 5) Vessel/Header Material Grade
- 6) Design Pressure
- 7) Design Temperature
- 8) Corrosion Allowance
- 9) Design Code ASME - B31.1 unless otherwise specified.

A dimensions are approximate values only.



INSERT WELDOLET

FORGED



INSERT WELDOLET FITTINGS

Orders and inquiries should provide the additional following information:

- 1) Vessel/Header Size
- 2) Vessel/Header Wall Thickness
- 3) Branch Size
- 4) Branch Wall Thickness
- 5) Vessel/Header Material Grade
- 6) Design Pressure
- 7) Design Temperature
- 8) Corrosion Allowance
- 9) Design Code - ASME B31.1 unless otherwise specified

INSERT WELDOLET FITTINGS

Outlet Size	'A' Dimensions (Height above run pipe)														
	1-1/2	2	2-1/2	3	4	5	6	8	10	12	14	16	18	20	24
Std. Wt. Run Pipe	1.5	1.5	1.62	1.75	2	2.25	2.38	2.75	3.06	3.38	3.50	3.75	3.81	4	4.56
XS Run Pipe	1.5	1.5	1.62	1.75	2	2.25	3.06	3.87	3.69	4.06	3.81	4.19	4.38	4.69	5.50
.500" to .750" Thick Run Pipe	-	-	-	2.88	3.31	3.75	4.12	4.18	4.25	4.37	4.50	4.89	5.13	5.62	6.5
.750" to 1.00" Thick Run Pipe	-	-	-	3.22	3.38	3.75	4.34	4.62	4.84	5.10	5.25	5.88	6.50	6.75	7.62
1.00" to 1.25" Thick Run Pipe	-	-	-	3.38	3.5	4	4.5	4.88	5.0	5.38	5.50	6.00	6.50	7.00	8.00
1.25" to 1.50" Thick Run Pipe	-	-	-	3.62	3.87	4.25	4.69	5.16	5.31	5.68	5.81	6.44	6.50	7.56	8.72

*"W" dimensions shown are maximum - depending on individual applications, at the time of order, these dimensions may be reduced. These dimensions are to be used for layout purposes to determine any possible spacing problems. In no way should these dimensions be used to pre-cut holes prior to welding. In all cases, the fitting should be used as the template to determine size of hole in run pipe.

- (1) Insert Weldolet fittings are not available for size-on-size applications, first reduction applications or second reduction applications.
- (2) Depending on run pipe wall thickness, some second reduction Insert Weldolet fittings can be manufactured - contact Nipoleit Overseas if a second reduction is your application.

ORDERING When ordering an Insert Weldolet fitting, see page 7.



NIPOLET

FORGED



A 1-PIECE FORGED FITTING THAT ELIMINATES THE NIPPLE, A COUPLING AND ONE WELD

It provides 100% reinforcement, improved flow characteristics and better distribution of stresses. The NUTCH OVERSEAS Nipolet® is a superior, engineered branch connection at far less cost than the coupling and nipple connection.


Size	Plain End and Threaded					
	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"
AX	3-1/2	3-1/2	3-1/2	3-1/2	3-1/2	3-1/2
C	15/16	1-3/16	1-7/16	1-3/4	2	2-9/16
AXX	3-1/2	3-1/2	3-1/2	3-1/2	3-1/2	3-1/2
C	9/16	3/4	1	1-5/16	1-1/2	1-11/16

- Threaded on plain end (male socket weld)
- Available in outlet sizes 1/2" thru 2"
- Available in 3 1/2", 4 1/2", 5 1/2" and 6 1/2" standard lengths. Other lengths available on request.
- Run Pipe combinations, see page 38.

XS and XXS ratings represent the schedule of the nipple portion of the Nipolet® fitting.



BRAZOLET®



FOR PIPE AND TUBING

The Brazolet® is a bronze brazing outlet fitting for silver brazing to copper or brass pipe or tubing. It is available for use on Type IP tubing, nominal pipe sizes and types K, L & M tubing. The branch outlets are machined with either threaded ends or for silver brazing the corresponding type of pipe or tubing. The use of the Brazolet enables installation of full straight lengths of pipe or tubing and cutting in branches afterwards.

Available in Reducing Sizes Only - For Run Sizes Through 14"
Also available: grooved for nigs per MIL-F-1183

BRAZOLET For IPS Pipe ASME SB-98 UNS C65500 ALLOY A

Outlet Sizes	A	B	C	Brazing Surface	F-MIN. MIL-F-1183
1/4	11/16	1	9/16	.188	.700
3/8	13/16	1-1/4	3/4	.190	.855
1/2	1	1-7/16	7/8	.220	1.020
3/4	1-1/16	1-11/16	1-1/8	.240	1.250
1	1-1/4	2-1/8	1-7/16	.270	1.535
1-1/4	1-5/16	2-1/2	1-3/4	.300	1.900
1-1/2	1-3/8	2-7/8	2	.330	2.160
2	1-1/2	3-1/2	2-9/16	.360	2.675
2-1/2	1-13/16	4	3	.384	3.215
3	2	4-13/16	3-11/16	.442	3.880
4	2-1/4	6	4-3/4	.476	4.940
5	2-5/8	7-1/16	5-9/16	.656	6.163

BRAZOLET For Tubing

TYPE K, L AND M TUBING. ASME SB-98 UNS C65500 ALLOY A



Outlet Sizes	A	B	C	Brazing Surface	F-MIN. MIL-F-1183
1/4	11/16	1	9/16	.188	.700
3/8	11/16	1	9/16	.190	.855
1/2	3/4	1-1/4	3/4	.190	.855
3/4	1	1-7/16	7/8	.220	1.020
1	1-1/16	1-11/16	1-1/8	.240	1.250
1-1/4	1-1/4	2-1/8	1-7/16	.270	1.535
1-1/2	1-5/16	2-1/2	1-3/4	.300	1.900
2	1-3/8	2-7/8	2	.330	2.160
2-1/2	1-1/2	3-1/2	2-9/16	.360	2.675
3	1-5/8	4-1/8	3	.384	3.215
4	2-1/8	5-1/2	4-5/16	.437	4.400

30



COUPOLET™

FORGED



Coupolet® fittings are for use in fire protection sprinkler systems and other low pressure piping systems.

- 300# rating
- NPT female threads
- Heat lot traceability on each piece
- ULL listed / FM. approved

300# FEMALE THREADED COUPOLET

Nominal Outlet Size	Dimensions		
	A	C	F
1/2"	15/16	0.745	1.188
3/4"	1	0.958	1.441
1"	1-3/16	1.250	1.562
1-1/4"	1-5/16	1.625	1.906
1-1/2"	1-9/16	1.780	2.188
2"	1-11/16	2.375	2.750
2-1/2"	1-13/16	2.890	3.386
3"	2-1/2	3.400	4.000
4"	3	4.380	5.000

Additional dimensions available upon request.

NOTE: In order to eliminate "Blind Holes" cut hole in pipe prior to welding.

INTERCHANGEABILITY OR COMBINATION OF SIZES

Run Sizes													
Coupolet Outlet Size	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"	5"	6"	8"	10"
1/2"	1/2	3/4	1	1-1/4 - 1	2-1/2 - 1-1/2	8-3	36-10						
3/4"	3/4	1	1-1/4	2-1-1/4	6-2-1/2	36-8							
1"	1	1-1/4	1-1/2	2-1-1/2	4-2-1/2	8-5	36-10						
1-1/4"	1-1/4	1-1/2	2-1/2 - 2	4-3	8-5	36-10							
1-1/2"	1-1/2	2	2-1/2	4-3	8-5	16-10	36-18						
2"	2	2-1/2	3	3-1/2	4	5	6	8	10	12-10	16-14	36-18	
2-1/2"	2-1/2	3	3-1/2	4	5	6	8	10	12	14	16-16	36-20	
3"	3	3-1/2	4	5	6	8	10	12	14	16	18	20	24
4"	5	6	8	10	14-12	16	18	20	24	36			




31



ENGINEERING SPECIFICATIONS

Weldolet® Welding Fitting

Bursting Test Comparison

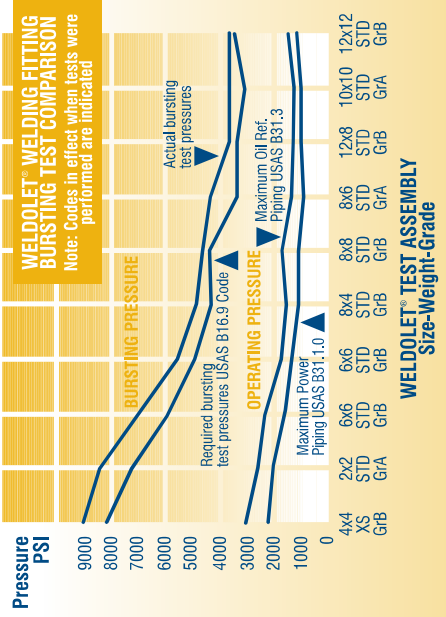

"Shape of Reinforcement," has been pioneered by NUTECH OVERSEAS for the past 60 years. The fact that shape is even more important than area replacement for branch reinforcement has gained wide industry recognition. Even though the Weldolet® does have sufficient area replacement, the factor setting it apart from conventional lap type reinforcement is its SHAPE . . . reinforcement close to the juncture - completely bonded homogeneous reinforcement avoiding cracks, filler welds, and re-entrant corners - reinforcement tapering at the sides to prevent abrupt change in thickness where fitting joins header pipe.




Specify and use the Weldolet® for all your full size and reducing branch connections. It is available in carbon steel and all alloys for any piping service.



ENGINEERING SPECIFICATIONS

DEVELOPMENT

DESIGN PRINCIPLES
Internal pressure tends to split pipe by hoop stress. At a 90° intersection, the maximum hoop stress is produced by the stresses of both branch and header as shown acting at point A. This combined stress tapers off to the hoop stress of the header only at point B. (See Fig. 1.)
The Weldolet® welding fitting is designed with thickness and weld bevel distributed in the same manner as the stresses, largest at crotch section and tapered to pipe wall thickness at skirt section.



CROUCH SECTION

The design of the Weldolet type of construction is based on compensating (see cross hatched area in Fig. 2) for the metal removed from the run pipe at the point where the largest stress concentrations would otherwise occur.

SKIRT SECTION

At the skirt of an unreinforced branch connection, the tendency under pressure is for this zone to become spherical or to bulge (see Fig. 3). In the case of the Weldolet type of construction, the skirt portion of the fitting attached to the header tapers from header thickness to a proportionally thick section which tends to keep the joint from distorting. Rupture does not occur until the header is pressurized well beyond the minimum bursting requirements of B16.9, standard for steel butt-welding fittings.

BRANCH REINFORCEMENT

USE INTERNALLY REINFORCED WELDOLET® WELDING FITTINGS WHICH ELIMINATE COMPUTATION.


After determining that a branch needs reinforcement because of internal pressure of external forces or because of the high hazard of pipe failure, the designer can avoid further calculating by the specification of Weldolet welding fittings, specifically designed to compensate for the primary and secondary stress factors. The Weldolet fully integrates the branch and run pipe with the heaviest reinforcement at the crotch. The Weldolet blends the branch into the run pipe without abrupt transitions or sharp re-entrant corners present when the reinforcement is not completely integrated with the branch and run, such as with pad reinforced nozzles. The funneled inlet of the Weldolet provides a wide, stable footing which relieves stress concentrations and improves fluid flow.

EVEN WHERE CALCULATIONS SHOW THAT REINFORCEMENT IS NOT REQUIRED the designer should, and in some cases must, satisfy himself on the following features and determine whether the use of the Weldolet is "good engineering" compared with the use of mitered branch nozzle construction.

- 1. FLUID FLOW** - The internal funnel of the Weldolet fitting avoids the impeded flow caused by the abrupt 90° angle of a mitered nozzle.
- 2. LARGE BRANCHES ON LARGE MAINS** - An unreinforced branch connection (nozzle), even when competently installed, is considerably weaker than the pipe. The amount of reinforcement necessary to restore the joint to full pipe strength requires complex calculations as outlined in the Code. The use of the Weldolet avoids these calculations and provides 100% pipe strength branch connections as required by Code.
- 3. SMALL BRANCHES ON LARGE MAINS** - All branches 2" and smaller should be constructed with a Weldolet. Threddolet or Sockolet, whether reinforcement is required or not. NUTECH OVERSEAS fittings provide the least expensive method of constructing branch connections in these sizes. Operating experience with piping systems points out the need for improved methods of attaching small pipes to large mains. The Weldolet fitting provides the ideal method of making the transition.
- 4. WORKMANSHIP** - Fabrication with a Weldolet avoids the abuses encountered in the field with mitered branch connections as outlined on page 5.



INSTALLATION PROCEDURE



PERTINENT POINTS ON SIZE ON SIZE WELDOLLET® FITTING INSTALLATION

In contrast to the reducing sizes, the size on size Weldolet and the first reducing size are designed with an elliptical hole (as shown on pages 9 and 11). This has been done to provide the necessary full size opening without requiring a 50% portion of the header pipe to be removed (it is actually closer to 40%). This reduced hole cut combines with the proper welding procedure to minimize the possibility of header distortion.

Multiple outlet headers requiring all full size openings are subject to distortion because of the large number of holes that have to be cut in close proximity to one another. To eliminate the possibility of distortion occurring when using Weldolets in this type of installation we recommend that a strap be left in the center of the hole, by cutting out two half moon sections (as shown in sketch). This strap acts as a support until after the Weldolet has been installed and is then cut out.

Since alloys are more difficult to weld than carbon steel, many companies have set up specified welding procedures. For those who do not have access to such specifications we offer the following suggestions:

CHROME MOLY WELDOLLET INSTALLATION


If the hole is to be flame cut rather than machine cut it is very important that all slag and rough edges be ground to a bright metal finish.

When preheating the materials to be welded, it is advisable to preheat to a temperature of 100° F more than shown in the code tables. This is done to eliminate the possibility of the material cooling to a temperature below the minimum shown on the table. Temperature crayons or electrical temperature controls are generally utilized to determine when the proper heat has been reached. Isolate all welding from chills and drafts.



When welding has been completed it is advisable to follow stress-relieving procedures at once. If however, this is not feasible, the welded section should be post heated to a dull red. The whole area should then be wrapped with a heat blanket and allowed to cool before stress relieving. The stress-relieving temperature should then be determined by the type of alloy and the engineer's recommended specifications on procedure.

STAINLESS STEEL WELDOLLET INSTALLATION


A hole saw or drill should be used to cut small size branch openings in stainless headers. Abrasive cutting wheels are generally used to make larger size holes. Arc cutting or the injection of iron powder into an acetylene flame are other methods used. If, however, any of these flame or arc methods are used, the hole should be cut under-size to allow for grinding out the heat-affected areas before welding. Either the Helarc or metal-arc methods may be used for welding. The sequence of welding passes for both alloy and stainless is the same as outlined for carbon steel Weldolet fittings.





INSTALLATION PROCEDURE




"Space" for Welding The Weldolet® is raised off the run pipe to establish proper weld gap by placing spacers, e.g. welding rods, under the fitting. This provides a uniform welding gap between the curvature of the run and base of fitting.




LONGITUDINAL SECTION
Fig. 1 Wide bases or footings at crotch section distribute internal and external stresses. Flared shaped opening provides improved flow conditions.




Tack Weld
The base joint is tack welded, preferably at four points; each half way between the crotch and skirt sections of the fitting. The spacers are then removed.



TRANSVERSE SECTION
Fig. 2 Note the blending of the skirt section of the Weldolet to the run pipe to avoid abrupt change in intersection. Throat of weld at this point is designated by the welding bevel.



Stringer Bead
The stringer bead is applied completely around the base of the fitting. The established weld gap assures full penetration.



EXAMPLE OF WELD PASS SEQUENCE
FIRST STRINGER PASS
SECOND STRINGER PASS
FIRST REINFORCING PASS
SECOND REINFORCING PASS
FINAL COVER PASS



ENGINEERING SPECIFICATIONS

WELDOLET® AND BUTT-WELDED FLEXOLET™ DIMENSIONS

Dimensions L₁, L₂, and L₃
Center of run pipe to face of fitting.
Root Gap not included.

Nominal Run Pipe Size Inches	Pipe Weight or Sch. No.	L Dim.	Outlet Size Inches									
			1/8	1/4	3/8	1/2	3/4	1	1-1/4	1-1/2	2	3
3/8	STD XS	L ₁ L ₂	1 1									
1/2	STD XS S160 & XXS	L ₁ L ₂ L ₃	1-1/16 1-1/16 1-3/16	1-1/16 1-1/16 1-3/16	1-3/16 1-3/16 1-1/2	1-3/16						
3/4	STD XS S160 & XXS	L ₁ L ₂ L ₃	1-3/16 1-3/16 1-1/4	1-3/16 1-3/16 1-1/4	1-1/4 1-1/4 1-7/16	1-7/16 1-7/16 1-3/4						
1	STD XS S160 & XXS	L ₁ L ₂ L ₃	1-5/16 1-5/16 1-3/8	1-5/16 1-5/16 1-3/8	1-1/2 1-1/2 1-7/8	1-1/16 1-1/16 2-1/8						
1-1/4	STD XS S160 & XXS	L ₁ L ₂ L ₃	1-7/16 1-7/16 1-3/16	1-7/16 1-7/16 1-3/16	1-11/16 1-11/16 2-1/8	1-7/8 1-7/8 2-1/8						
1-1/2	STD XS S160 & XXS	L ₁ L ₂ L ₃	1-9/16 1-9/16 1-1/16	1-9/16 1-9/16 1-1/16	1-11/16 1-11/16 2-1/8	2 2 2-1/8						
2	STD XS S160 & XXS	L ₁ L ₂ L ₃	1-13/16 1-13/16 1-13/16	1-13/16 1-13/16 1-13/16	2-1/16 2-1/16 2-1/16	2-1/4 2-1/4 2-1/4						
2-1/2	STD XS S160 & XXS	L ₁ L ₂ L ₃	2-1/16 2-1/16 2-1/16	2-1/16 2-1/16 2-1/16	2-5/16 2-5/16 2-5/16	2-1/2 2-1/2 2-1/2						
3	STD XS S160 & XXS	L ₁ L ₂ L ₃	2-3/8 2-3/8 2-3/8	2-3/8 2-3/8 2-3/8	2-1/2 2-1/2 2-1/2	2-5/8 2-5/8 2-5/8						
3-1/2	STD XS S160 & XXS	L ₁ L ₂ L ₃	2-5/8 2-5/8 2-5/8	2-5/8 2-5/8 2-5/8	2-3/4 2-3/4 2-3/4	3-1/8 3-1/8 3-1/8						
4	STD XS S160 & XXS	L ₁ L ₂ L ₃	2-7/8 2-7/8 2-7/8	2-7/8 2-7/8 2-7/8	3 3 3	3-1/8 3-1/8 3-1/8						
5	STD XS S160 & XXS	L ₁ L ₂ L ₃	3-1/16 3-1/16 3-1/16	3-1/16 3-1/16 3-1/16	3-9/16 3-9/16 3-9/16	3-7/8 3-7/8 3-7/8						
6	STD XS S160 & XXS	L ₁ L ₂ L ₃	3-15/16 3-15/16 3-15/16	3-15/16 3-15/16 3-15/16	4-1/16 4-1/16 4-1/16	4-3/8 4-3/8 4-3/8						
8	STD XS S160 & XXS	L ₁ L ₂ L ₃	4-15/16 4-15/16 4-15/16	4-15/16 4-15/16 4-15/16	5-1/16 5-1/16 5-1/16	5-3/8 5-3/8 5-3/8						
10	STD XS S160 & XXS	L ₁ L ₂ L ₃	5-1/8 5-1/8 5-1/8	5-1/8 5-1/8 5-1/8	6-1/4 6-1/4 6-1/4	6-7/8 6-7/8 6-7/8						
12	STD XS S160 & XXS	L ₁ L ₂ L ₃	5-7/8 5-7/8 5-7/8	5-7/8 5-7/8 5-7/8	7-1/4 7-1/4 7-1/4	7-1/8 7-1/8 7-1/8						
14	STD XS S160 & XXS	L ₁ L ₂ L ₃	6-1/8 6-1/8 6-1/8	6-1/8 6-1/8 6-1/8	7-3/4 7-3/4 7-3/4	8-1/4 8-1/4 8-1/4						
16	STD XS S160 & XXS	L ₁ L ₂ L ₃	6-5/8 6-5/8 6-5/8	6-5/8 6-5/8 6-5/8	8-3/4 8-3/4 8-3/4	9-1/4 9-1/4 9-1/4						
18	STD XS S160 & XXS	L ₁ L ₂ L ₃	6-7/8 6-7/8 6-7/8	6-7/8 6-7/8 6-7/8	9-1/8 9-1/8 9-1/8	10-1/16 10-1/16 10-1/16						
20	STD XS S160 & XXS	L ₁ L ₂ L ₃	7-1/8 7-1/8 7-1/8	7-1/8 7-1/8 7-1/8	10-3/4 10-3/4 10-3/4	11-1/16 11-1/16 11-1/16						
24	STD XS S160 & XXS	L ₁ L ₂ L ₃	8-1/8 8-1/8 8-1/8	8-1/8 8-1/8 8-1/8	12-3/4 12-3/4 12-3/4	13-1/16 13-1/16 13-1/16						



ENGINEERING SPECIFICATIONS

WELDOLET® AND BUTT-WELDED FLEXOLET™ DIMENSIONS CONTINUED

Nominal Run Pipe Size Inches	Pipe Weight or Sch. No.	L Dim.	Outlet Size Inches									
			3-1/2	4	5	6	8	10	12	14	16	18
3/8	STD XS	L ₁ L ₂										
1/2	STD XS S160 & XXS	L ₁ L ₂ L ₃										
3/4	STD XS S160 & XXS	L ₁ L ₂ L ₃										
1	STD XS S160 & XXS	L ₁ L ₂ L ₃										
1-1/4	STD XS S160 & XXS	L ₁ L ₂ L ₃										
1-1/2	STD XS S160 & XXS	L ₁ L ₂ L ₃										
2	STD XS S160 & XXS	L ₁ L ₂ L ₃										
2-1/2	STD XS S160 & XXS	L ₁ L ₂ L ₃										
3	STD XS S160 & XXS	L ₁ L ₂ L ₃										
3-1/2	STD XS S160 & XXS	L ₁ L ₂ L ₃										
4	STD XS S160 & XXS	L ₁ L ₂ L ₃										
5	STD XS S160 & XXS	L ₁ L ₂ L ₃										
6	STD XS S160 & XXS	L ₁ L ₂ L ₃										
8	STD XS S160 & XXS	L ₁ L ₂ L ₃										
10	STD XS S160 & XXS	L ₁ L ₂ L ₃										
12	STD XS S160 & XXS	L ₁ L ₂ L ₃										
14	STD XS S160 & XXS	L ₁ L ₂ L ₃										
16	STD XS S160 & XXS	L ₁ L ₂ L ₃										
18	STD XS S160 & XXS	L ₁ L ₂ L ₃										
20	STD XS S160 & XXS	L ₁ L ₂ L ₃										
24	STD XS S160 & XXS	L ₁ L ₂ L ₃										

CONVENTIONAL RUN SIZE COMBINATIONS

STANDARD WEIGHT WELDOLET®, EXTRA STRONG WELDOLET®,

CLASS 3000 THREDOLET®, CLASS 3000 SOCKOLET®, EXTRA STRONG NIPOLET®

Run Sizes	Outlet Size Inches									
	1/8	1/4	3/8	1/2	3/4	1	1-1/4	1-1/2	2	2-1/2
3/8	1/2	3/4	1	1-1/4	1-1/2	2	2-1/2	3	3-1/2	4
1/2	1-3/4	2-1/2	3-1/2	4	5	6	8	10	14-12	18-16
1-1/4	2-1/2	3-1/2	4	5	6	8	10	14-12	18-16	24-20
1-1/2	3-1/2	4	5	6	8	10	14-12	18-16	24-20	30-26
2-1/2	4-3/2	5	6	8	10	14-12	18-16	24-20	30-26	36-30
3-1/2	5-3	6	8	10	14-12	18-16	24-20	30-26	36-30	42-36
4	6	8	10	14-12	18-16	24-20	30-26	36-30	42-36	48-42
5	8	10	14-12	18-16	24-20	30-26	36-30	42-36	48-42	54-48
6	10	14-12	18-16	24-20	30-26	36-30	42-36	48-42	54-48	60-54
8	14-12	18-16	24-20	30-26	36-30	42-36	48-42	54-48	60-54	66-60
10	18-16	24-20	30-26	36-30	42-36	48-42	54-48	60-54	66-60	72-66
12	24-20	30-26	36-30	42-36	48-42	54-48	60-54	66-60	72-66	78-72
14	30-26	36-30	42-36	48-42	54-48	60-54	66-60	72-66	78-72	84-78
16	36-30	42-36	48-42	54-48	60-54	66-60	72-66	78-72	84-78	90-84
18	42-36	48-42	54-48	60-54	66-60	72-66	78-72	84-78	90-84	96-90
20	48-42	54-48	60-54	66-60	72-66	78-72	84-78	90-84	96-90	102-96
22	54-48	60-54	66-60	72-66	78-72	84-78	90-84	96-90	102-96	108-102
24	60-54	66-60	72-66	78-72	84-78	90-84	96-90	102-96	108-102	114-108
26	66-60	72-66	78-72	84-78	90-84	96-90	102-96	108-102	114-108	120-114
28	72-66	78-72	84-78	90-84	96-90	102-96	108-102	114-108	120-114	126-120
30	78-72	84-78	90-84	96-90	102-96	108-102	114-108	120-114	126-120	132-126
32	84-78	90-84	96-90	102-96	108-102	114-108	120-114	126-120	132-126	138-132
34	90-84	96-90	102-96	108-102	114-108	120-114	126-120	132-126	138-132	144-138
36	96-90	102-96	108-102	114-108	120-114	126-120	132-126	138-132	144-138	150-144
38	102-96	108-102	114-108	120-114	126-120	132-126	138-132	144-138	150-144	156-150
40	108-102	114-108	120-114	126-120	132-126	138-132	144-138	150-144	156-150	162-156
42	114-108	120-114	126-120	132-126	138-132	144-138	150-144	156-150	162-156	168-162
44	120-114	126-120	132-126	138-132	144-138	150-144	156-150	162-156	168-162	174-168
46	126-120	132-126	138-132	144-138	150-144	156-150	162-156	168-162	174-168	180-174
48	132-126	138-132	144-138	150-144	156-150	162-156	168-162	174-168	180-174	186-180
50	138-132	144-138	150-144	156-150	162-156	168-162	174-168	180-174	186-180	192-186
52	144-138	150-144	156-150	162-156	168-162	174-168	180-174	186-180	192-186	198-192
54	150-144	156-150	162-156	168-162	174-168	180-174	186-180	192-186	198-192	204-198
56	156-150	162-156	168-162	174-168	180-174	186-180	192-186	198-192	204-198	210-204
58	162-156	168-162	174-168	180-174	186-180	192-186	198-192	204-198	210-204	216-210
60	168-162	174-168	180-174	186-180	192-186	198-192	204-198	210-204	216-210	222-216
62	174-168	180-174	186-180	192-186	198-192	204-198	210-204	216-210	222-216	228-222
64	180-174	186-180	192-186	198-192	204-198	210-204	216-210	222-216	228-222	234-228
66	186-180	192-186	198-192	204-198	210-204	216-210	222-216	228-222	234-228	240-234
68	192-186	198-192	204-198	210-204	216-210	222-216	228-222	234-228	240-234	246-240
70	198-192	204-198	210-204	216-210	222-216	228-222	234-228	240-234	246-240	252-246
72	204-198	210-204	216-210	222-216	228-222	234-228	240-234	246-240	252-246	258-252
74	210-204	216-210	222-216	228-222	234-228	240-234	246-240	252-246	258-252	264-258
76	216-210	222-216	228-222	234-228	240-234	246-240	252-246	258-252	264-258	270-264
78	222-216	228-222	234-228	240-234	246-240	252-246	258-252	264-258	270-264	276-270
80	228-222	234-228	240-234	246-240	252-246	258-252	264-258	270-264	276-270	282-276
82	234-228	240-234	246-240	252-246	258-252	264-258	270-264	276-270	282-276	288-282
84	240-234	246-240	252-246	258-252	264-258	270-264	276-270	282-276	288-282	294-288
86	246-240	252-246	258-252	264-258	270-264	276-270	282-276	288-282	294-288	300-294
88	252-246	258-252	264-258	270-264	276-270	282-276	288-282	294-288	300-294	306-300
90	258-252	264-258	270-264	276-270	282-276	288-282	294-288	300-294	306-300	312-306
92	264-258	270-264	276-270	282-276	288-282	294-288	300-294	306-300	312-306	318-312
94	270-264	276-270	282-276	288-282	294-288	300-294	306-300	312-306	318-312	324-318
96	276-270	282-276	288-282	294-288	300-294	306-300	312-306	318-312	324-318	330-324
98	282-276	288-282	294-288	300-294	306-300	312-306	318-312	324-318	330-324	336-330
100	288-282	294-288	300-294	306-300	312-306	318-312	324-318	330-324	336-330	342-336
102	294-288	300-294	306-300	312-306	318-312	324-318	330-324	336-330	342-336	348-342
104	300-294	306-300	312-306	318-312	324-318	330-324	336-330	342-336	348-342	354-348
106	306-300	312-306	318-312	324-318	330-324	336-330	342-336	348-342	354-348	360-354
108	312-306	318-312	324-318	330-324	336-330	342-336	348-342	354-348	360-354	366-360
110	318-312	324-318	330-324	336-330	342-336	348-342	354-348	360-354	366-360	372-366
112	324-318	330-324	336-330	342-336	348-342	354-348	360-354	366-360	372-366	378-372
114	330-324	336-330	342-336	348-342	354-348	360-354	366-360	372-366	378-372	384-378
116	336-330	342-336	348-342	354-348	360-354	366-360	372-366	378-372	384-378	390-384
118	342-336	348-342	354-348	360-354	366-360	372-366	378-372	384-378	390-384	396-390
120	348-342	354-348	360-354	366-360	372-366	378-372	384-378	390-384	396-390	402-396
122	354-348	360-354	366-360	372-366	378-372	384-378	390-384	396-390	402-396	408-402
124	360-354	366-360	372-366	378-372	384-378	390-384	396-390	402-396	408-402	414-408
126	366-360	372-366	378-372	384-378	390-384	396-390	402-396	408-402	414-408	420-414
128	372-366	378-372	384-378	390-384	396-390	402-396	408-402	414-408	420-414	426-420
130	378-372	384-378	390-384	396-390	402-396	408-402	414-408	420-414	426-420	432-426
132	384-378	390-384	396-390	402-396	408-402	414-408	420-414	426-420	432-426	438-432
134	390-384	396-390	402-396	408-402	414-408	420-414	426-420	432-426	438-432	444-438
136	396-390	402-396	408-402	414-408	420-414	426-420	432-426	438-432	444-438	450-444
138	402-396	408-402	414-408	420-414	426-420	432-426	438-432	444-438	450-444	456-450
140	408-402	414-408	420-414	426-420	432-426	438-432	444-438	450-444	456-450	462-456
142	414-408	420-414	426-420	432-426	438-432	444-438	450-444	456-450	462-456	468-462
144	420-414	426-420	432-426	438-432	444-438	450-444	456-450	462-456	468-462	474-468
146	426-420	432-426	438-432	444-438	450-444	456-450	462-456	468-462	474-468	480-474
148	432-426	438-432	444-438	450-444	456-450	462-456	468-462	474-468	480-474	486-480
150	438-432	444-438	450-444	456-450	462-456	468-462	474-468	480-474	486-480	492-486
152	444-438	450-444	456-450	462-456	468-462	474-468	480-474	486-480	492-486	498-492
154	450-444	456-450	462-456	468-462	474-468	480-474	486-480	492-486	498-492	504-498
156	456-450	462-456	468-462	474-468	480-474	486-480	492-486	498-492	504-498	510-504
158	462-456	468-462	474-468	480-474	486-480	492-486	498-492	504-498	510-504	516-510
160	468-462	474-468	480-474	486-480	492-486	498-492	504-498	510-504	516-510	522-516
162	474-468	480-474	486-480	492-486	498-492	504-498	510-504	516-510	522-516	528-522
164	480-474	486-480	492-486	498-492	504-498	510-504	516-510	522-516	528-522	534-528
166	486-480	492-486	498-492	504-498	510-504	516-510	522-516	528-522	534-528	540-534
168	492-486	498-492	504-498	510-504	516-510	522-516	528-522	534-528	540-534	546-540
170	498-492	504-498	510-504	516-510	522-516	528-522	534-528	540-534	546-540	552-546
172	504-498	510-504	516-510	522-516	528-522	534-528	540-534	546-540	552-546	558-552
174	510-504	516-510	522-516	528-522	534-528	540-534	546-540	552-546	558-552	564-558
176	516-510	522-516	528-522	534-528	540-534	546-540	552-546	558-552	564-558	570-564
178	522-516	528-522	534-528	540-534	546-540	552-546	558-552	564-558	570-564	5



ENGINEERING SPECIFICATIONS

FLEXOLET™ RUN SIZE COMBINATIONS

STAINLESS STEEL & ALLOY CONSOLIDATION CHART

Outlet Size Inches											
	1/4	3/8	1/2	3/4	1	1-1/4	2	2-1/2	3	3-1/2	4
1/4 36-3/8 SW (3000#) & BW (STD)	1/4 36-3/8	1/2-3/8 36-3/4	1-1/2 36-1 1/4	2-3/4 36-2 1/2	3-1/2 36-4	4-1/2 36-5 1/2	5-1/2 36-6 1/2	6-1/2 36-7 1/2	7-1/2 36-8 1/2	8-1/2 36-9 1/2	9-1/2 36-10 1/2
3/8-1/4 36-1/2 BW (XS)	3/8-1/4 36-1/2	3/4-1/2 36-1	1-1/2-3/4 36-1 1/2	2-1/2-1/2 36-2 1/2	3-1/2-1/2 36-3 1/2	4-1/2-1/2 36-4 1/2	5-1/2-1/2 36-5 1/2	6-1/2-1/2 36-6 1/2	7-1/2-1/2 36-7 1/2	8-1/2-1/2 36-8 1/2	9-1/2-1/2 36-9 1/2
3/8-1/4 36-1/4 BW (6000#) & THRD (3000#)	3/8-1/4 36-1/4	3/4-3/8 36-1 1/4	1-1/2-3/4 36-1 1/2	2-1/2-1/2 36-2 1/2	3-1/2-1/2 36-3 1/2	4-1/2-1/2 36-4 1/2	5-1/2-1/2 36-5 1/2	6-1/2-1/2 36-6 1/2	7-1/2-1/2 36-7 1/2	8-1/2-1/2 36-8 1/2	9-1/2-1/2 36-9 1/2

Inventory Reduction

The OLET™ product line, means reduced inventory! The charts on these pages represent the full range of the Flexolet™ product run size combinations. Flexolet™ branch connections have been designed to substantially reduce warehouse

How It Works

Each charted outlet size shown on this page is designed to fit a number of run pipe sizes. The

drawings on pg. 39 reflect the allowed fit-up gap per MSS-SP-97-2001 specification.

The design of the run curvature is such that, in all instances, the fit-up gap at the top of the run pipe or at the ear section of the fitting will not be more than 1/16". This gap is negligible when welding.

CONSOLIDATIONS BUTT-WELD With 5s & 10s BRANCH I.D.

Run Sizes	Outlet Size Inches														
	1/2	3/4	1	1-1/4	1-1/2	2	2-1/2	3	3-1/2	4	5	6	8	10	12
	1 1/4 - 1/2	3/4	1 1/2 - 1	1 1/4	1 1/2	2	2 1/2	3	3 1/2	4	5	6	8	10	12
	36 - 1 1/2	2 1/2 - 1	4 - 2	2 - 1 1/2	2	3 - 2 1/2	3 1/2 - 3	3 1/2	4	5	6	8	10	12	14
		36 - 3	36 - 5	6 - 2 1/2	3 - 2 1/2	5 - 3 1/2	5 - 4	5	6	8	10	12	14	16	18
				36 - 8	10 - 3 1/2	18 - 6	10 - 6	5	10 - 8	12 - 10	14 - 12	14	16	18	20
					36 - 12	36 - 20	28 - 12	8 - 6	10 - 8	18 - 14	18 - 16	16	18	20	22
							36 - 28	14 - 10	18 - 12	44 - 20	30 - 20	26 - 20	18	20	22
								42 - 16	56 - 20	72 - 46	72 - 32	40 - 28	22 - 24	24	26
									80 - 60			80 - 42	28 - 24	28 - 26	26
													36 - 30	34 - 30	30 - 28
														48 - 38	44 - 34
														52 - 44	48 - 36
														80 - 52	72 - 56
															60 - 52
															80 - 64